

Rec'd PCT/PTO

05 APR 2003



PCT/IB 03/04136

15.03.03



INVESTOR IN PEOPLE

IB03/04136

**PRIORITY
DOCUMENT**

SUBMITTED OR TRANSMITTED IN
COMPLIANCE WITH RULE 17.1(a) OR (b)

REC'D 02 OCT 2003

WIPO PCT


The Patent Office
Concept House
Cardiff Road
Newport
South Wales
NP10 8QQ

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

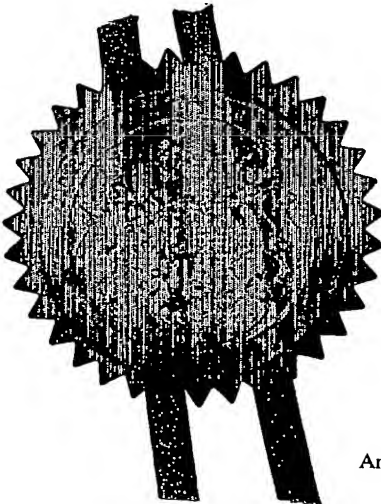

Signed *He Behen*

Dated 16 July 2003

An Executive Agency of the Department of Trade and Industry

BEST AVAILABLE COPY

Patents Form 1/77

Patents Act 1977
(Rule 16)

THE PATENT OFFICE
L
Office

- 8 OCT 2002

08OCT02 E754077-2 D 2879
P01/7700 0.00-0223305.4

1/77

Request for grant of a patent
(See notes on the back of this form. You can
also get an explanatory leaflet from the Patent
Office to help you fill in this form)

The Patent Office

Cardiff Road
Newport
Gwent NP10 8QQ

| | | | | |
|----|--|---|---------------------------------|----------------|
| 1. | Your reference | PHGB 020172 | | |
| 2. | Patent application number (The Patent Office will fill in this part) | 0223305.4 | | |
| 3. | Full name, address and postcode of the or of each applicant (underline all surnames) | KONINKLIJKE PHILIPS ELECTRONICS N.V. GROENEWOUDSEWEG 1 5621 BA EINDHOVEN THE NETHERLANDS | | |
| | Patents ADP Number (if you know it) | 7419294001 | | |
| | If the applicant is a corporate body, give the country/state of its incorporation | THE NETHERLANDS | | |
| 4. | Title of the invention | ELECTROLUMINESCENT DISPLAY DEVICES | | |
| 5. | Name of your agent (if you have one) | PAUL LEWIS WILLIAMSON | | |
| | "Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode) | Philips Intellectual Property & Standards Cross Oak Lane Redhill Surrey RH1 5HA | | |
| | Patents ADP number (if you know it) | 7163322002 | | |
| 6. | If you are declaring priority from one or more earlier patent applications, give the country | Country | Priority Application number | Date of filing |
| | and the date of filing of the or of each of these earlier applications and (if you know it) the or each application number | | | |
| 7. | If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application | Number of earlier application | Date of filing (day/month/year) | |
| 8. | Is a statement of inventorship and of right to grant of a patent required in support of this request? (Answer "Yes" if: a) any applicant named in part 3 is not an inventor, or b) there is an inventor who is not named as an applicant, or c) any named applicant is a corporate body. See note (d)) | YES | | |

Patents form

Patents Form 1/77

9. Enter the number of sheets for any of the following items you are filing with this form.
Do not count copies of the same document.

Continuation sheets of this form

| | |
|-------------|----------------|
| Description | 11 |
| Claims(s) | 3 |
| Abstract | 1 <i>EMC</i> |
| Drawings | 2 <i>or by</i> |

10. If you are also filing any of the following, state how many against each item:

Priority Documents

Translations of priority documents

Statement of inventorship and right
to grant of a patent (*Patents Form 7/77*)

Request for preliminary examination and
search (*Patents Form 9/77*)

Request for substantive examination
(*Patents Form 10/77*)

Any other documents
(*Please specify*)

11. I/We request the grant of a patent on the basis of this application.

Signature

Date

7/10/02

12. Name and daytime telephone number of person to contact in the United Kingdom

01293 81 5280

P L WILLIAMSON

Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

Notes

a) If you need help to fill in this form or you have any questions, please contact the Patent Office on 0645 500505.

b) Write your answers in capital letters using black ink or you may type them.

c) If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.

d) If you have answered "Yes" *Patents Form 7/77* will need to be filed.

e) Once you have filled in the form you must remember to sign and date it.

f) For details of the fee and ways to pay please contact the Patent Office.

Patents Form 1

DESCRIPTION

ELECTROLUMINESCENT DISPLAY DEVICES

5 This invention relates to electroluminescent display devices, particularly active matrix display devices having thin film switching transistors associated with each pixel.

 Matrix display devices employing electroluminescent, light-emitting, display elements are well known. The display elements may comprise organic
10 thin film electroluminescent elements, for example using polymer materials, or else light emitting diodes (LEDs) using traditional III-V semiconductor compounds. Recent developments in organic electroluminescent materials, particularly polymer materials, have demonstrated their ability to be used
15 practically for video display devices. These materials typically comprise one or more layers of a semiconducting conjugated polymer sandwiched between a pair of electrodes, one of which is transparent and the other of which is of a material suitable for injecting holes or electrons into the polymer layer.

 The polymer material can be fabricated using a CVD process, or simply by a spin coating technique using a solution of a soluble conjugated polymer.
20 Ink-jet printing may also be used. Organic electroluminescent materials exhibit diode-like I-V properties, so that they are capable of providing both a display function and a switching function, and can therefore be used in passive type displays. Alternatively, these materials may be used for active matrix display devices, with each pixel comprising a display element and a switching device
25 for controlling the current through the display element.

 Display devices of this type have current-driven display elements, so that a conventional, analogue drive scheme involves supplying a controllable current to the display element. It is known to provide a current source transistor as part of the pixel configuration, with the gate voltage supplied to
30 the current source transistor determining the current through the display element. A storage capacitor holds the gate voltage after the addressing phase.

Figure 1 shows a known pixel circuit for an active matrix addressed electroluminescent display device. The display device comprises a panel having a row and column matrix array of regularly-spaced pixels, denoted by the blocks 1 and comprising electroluminescent display elements 2 together with associated switching means, located at the intersections between crossing sets of row (selection) and column (data) address conductors 4 and 6. Only a few pixels are shown in the Figure for simplicity. In practice, there may be several hundred rows and columns of pixels. The pixels 1 are addressed via the sets of row and column address conductors by a peripheral drive circuit comprising a row, scanning, driver circuit 8 and a column, data, driver circuit 9 connected to the ends of the respective sets of conductors.

The electroluminescent display element 2 comprises an organic light emitting diode, represented here as a diode element (LED) and comprising a pair of electrodes between which one or more active layers of organic electroluminescent material is sandwiched. The display elements of the array are carried together with the associated active matrix circuitry on one side of an insulating support. Either the cathodes or the anodes of the display elements are formed of transparent conductive material. The support is of transparent material such as glass and the electrodes of the display elements 2 closest to the substrate may consist of a transparent conductive material such as ITO so that light generated by the electroluminescent layer is transmitted through these electrodes and the support so as to be visible to a viewer at the other side of the support. Typically, the thickness of the organic electroluminescent material layer is between 100 nm and 200nm. Typical examples of suitable organic electroluminescent materials which can be used for the elements 2 are known and described in EP-A-0 717446. Conjugated polymer materials as described in WO96/36959 can also be used.

Figure 2 shows in simplified schematic form a known pixel and drive circuitry arrangement for providing voltage-programmed operation. Each pixel 1 comprises the EL display element 2 and associated driver circuitry. The driver circuitry has an address transistor 16 which is turned on by a row address pulse on the row conductor 4. When the address transistor 16 is

turned on, a voltage on the column conductor 6 can pass to the remainder of the pixel. In particular, the address transistor 16 supplies the column conductor voltage to a current source 20, which comprises a drive transistor 22 and a storage capacitor 24. The column voltage is provided to the gate of the drive transistor 22, and the gate is held at this voltage by the storage capacitor 24 even after the row address pulse has ended. The drive transistor 22 draws a current from the power supply line 26.

The drive transistor 22 in this circuit is implemented as a PMOS TFT, so that the storage capacitor 24 holds the gate-source voltage fixed. This results in a fixed source-drain current through the transistor, which therefore provides the desired current source operation of the pixel.

The above basic pixel circuit is a voltage-programmed pixel, and there are also current-programmed pixels which sample a drive current. However, all pixel configurations require current to be supplied to each pixel.

One problem with voltage programmed pixels, particularly using polysilicon thin film transistors, is that different transistor characteristics across the substrate (particularly the threshold voltage) give rise to different relationships between the gate voltage and the source-drain current, and artefacts in the displayed image result.

It has been recognised that a current-programmed pixel can reduce or eliminate the effect of transistor variations across the substrate. For example, a current-programmed pixel can use a current mirror to sample the gate-source voltage on a sampling transistor through which the desired pixel drive current is driven. The sampled gate-source voltage is used to address the drive transistor. This partly mitigates the problem of uniformity of devices, as the sampling transistor and drive transistor are adjacent each other over the substrate and can be more accurately matched to each other. Another current sampling circuit uses the same transistor for the sampling and driving, so that no transistor matching is required, although additional transistors and address lines are required.

A further problem with LED displays arises from the significant currents drawn by the pixels. The displays are typically backward-emitting, through the

substrate carrying the active matrix circuitry. This is the preferred arrangement because the desired cathode material of the EL display element is opaque, so that the emission is from the anode side of the EL diode, and furthermore it is not desirable to place this preferred cathode material against the active matrix circuitry. Metal row conductors are formed to define power supply lines, and for these backward emitting displays they need to occupy the space between display areas, as they are opaque. For example, in a 12.5cm (diagonal) display, which is suitable for portable products, the row conductor may be approximately 11cm long and $20\mu\text{m}$ wide. For a typical metal sheet resistance of $0.2\Omega/\text{square}$, this gives a line resistance for a metal row conductor of $1.1\text{k}\Omega$. A bright pixel may draw around $8\mu\text{A}$, and the current drawn is distributed along the row. The significant row conductor resistance gives rise to voltage drops along the row conductors, and these voltage variations along the power supply line alter the gate-source voltage on the drive transistors, and thereby affect the brightness of the display. Furthermore, as the currents drawn by the pixels in the row are image-dependent, it is difficult to correct the pixel drive levels by data correction techniques, and the distortion is essentially a cross talk between pixels in different columns.

The voltage drops can be reduced by a factor of 4 by drawing current from both ends of the row, and improvements in efficiency of the EL materials can also reduce the current drawn. Nevertheless significant voltage drops are still present. These voltage drops also give rise to performance limitations in current mirror pixel circuits, and thin film transistors are inherently non-ideal current source devices (the output current will in fact depend on both the source and drain voltages rather than only on the gate-source voltage).

According to the invention, there is provided an active matrix electroluminescent display device comprising an array of display pixels, each pixel comprising:

an electroluminescent (EL) display element and a drive transistor for driving a current through the display element;

a first switch (30) enabling power from a power supply line (26) to be supplied to the display element;

a second switch for routing current from a current-measurement supply line to the display element, the first and second switches being operated in
5 complementary manner; and

a control line for controlling the gate voltage applied to the drive transistor, wherein a feedback system is provided between the current-measurement supply line and the control line.

This arrangement implements a feedback path between a current-
10 measurement supply line used only for a pixel programming phase and the normal control line to which the pixel drive signal is provided, such that the control line voltage can be controlled in closed loop manner to achieve the desired current. The resulting control voltage can then be used for the remainder of the frame period. Thus, the desired pixel current is used as the
15 input signal, and the actual current flowing is used as a feedback signal during the addressing phase. This enables differences in drive transistor characteristics to be tolerated. The pixel is then driven using the programmed voltage level during the remainder of the frame period. In particular, the feedback system enables a gate voltage to be determined corresponding to a
20 desired current flow through the drive transistor.

The feedback system is preferably provided in a column driver of the display device.

Each pixel preferably further comprises an address transistor connected between the control line and the gate of the drive transistor. This is used to
25 enable the control signal on a control line (typically a column line) to be applied to the correct pixel row. The address transistor, and the first and second switches can each be controlled by a shared control line, thereby simplifying implementation of the invention. The address transistor and the second switch are controlled synchronously, and they both form the feedback loop during the
30 pixel programming stage, whereas the first switch is not used during programming but is used during the remainder of the frame period.

Each switch may of course comprise a transistor, and one of the switches can be an NMOS TFT and the other a PMOS TFT.

The feedback system, in the peripheral circuitry, may comprise a current-to-voltage converter section for providing a first voltage corresponding
5 to the current drawn from the current-measurement supply line, and a comparator section for comparing the first voltage with an input voltage representing the desired current. These effectively provide measurement of the current drawn and comparison with the desired current (although converted into the voltage domain). A drive section then provides a voltage on
10 the control line, the feedback loop being in equilibrium when the control line voltage provides drive of the drive transistor giving rise to the desired current.

The device is thus operable in two modes:

a first pixel programming mode in which a desired pixel drive current is drawn from the current-measurement supply line and the feedback system
15 generates the corresponding gate voltage for the drive transistor, the corresponding gate-source voltage for the drive transistor being stored; and

a second mode in which a current is driven through the drive transistor and the EL display element using the stored gate-source voltage.

The invention also provides a method of addressing an active matrix
20 electroluminescent display device comprising an array of display pixels, in which each pixel comprises an electroluminescent (EL) display element and a drive transistor for driving a current through the display element, the method comprising, for each pixel:

applying a voltage to the drive transistor to drive a current through the
25 display element, the current being drawn from a current-measurement supply line;

processing the current using feedback control circuitry outside the array of pixels and having an input representing the desired current;

generating a control voltage in the feedback control circuitry for the
30 drive transistor using the processed current, thereby implementing a feedback control loop which reaches equilibrium when the current corresponds to the desired current, and supplying the control voltage to the pixel;

within the pixel, storing a voltage derived from the control voltage; and
applying the stored voltage to the gate of the drive transistor and
drawing current from a power supply line to illuminate the display element.

This method uses current feedback during pixel programming but
5 nevertheless implements voltage-programmed pixel driving. The method
provides per-pixel compensation of the drive transistor characteristics, whilst
enabling the feedback control circuitry to be outside the array of pixels.

Processing the current may comprise converting the current into a
voltage, and comparing the voltage with an input voltage representing the
10 desired current to produce an amplified differential output. Current is
preferably drawn from a power supply line through a first switch and current is
sourced from the current-measurement supply line through a second switch,
the first and second switches being operated in complimentary manner, the
first switch being used after an initial pixel programming phase and the second
15 switch being used during the initial pixel programming phase.

The invention will now be described by way of example with reference
to the accompanying drawings, in which:

Figure 1 shows a known EL display device;

20 Figure 2 is a simplified schematic diagram of a known pixel circuit using
an input drive voltage;

Figure 3 shows a simplified schematic diagram of a pixel layout for a
display device of the invention; and

Figure 4 shows the column driver architecture for a display using the
25 pixel of Figure 3.

The invention provides an active matrix electroluminescent display
device in which current feedback is used during pixel programming so that any
effects of differences between characteristics of the drive transistor of different
30 pixels are avoided.

The same reference numerals are used in different figures for the same
components, and description of these components will not be repeated.

Figure 3 shows a first pixel arrangement in accordance with the invention. As in the conventional pixel of Figure 2, the pixel is voltage-programmed, and a storage capacitor 24 holds the voltage on the gate of the drive transistor 22 after the pixel addressing (programming) phase.

5 Within the pixel, two current paths are provided to the display element 2. One uses the conventional power supply line 26, but an additional transistor switch 30 is provided between the power supply line 26 and the drive transistor 22. A second transistor switch 32 provides a current path from a current-measurement supply line 34 to the drive transistor 22 and display
10 element 2. In Figure 3, the transistor 30 is a PMOS TFT and the second transistor switch 32 is an NMOS TFT. These are both controlled at their gates by the row conductor 4, and as a result, they are operated in complementary manner.

By switching off the transistor 30 and switching on the transistor 32, it is
15 possible to ensure that the display element current is drawn from the current-measurement supply line 34. As this line is a column conductor, it provides current only to the individual pixel (as only one row of pixels is addressed at any one time) and it can thus operate as a current feedback circuit.

A feedback system is provided between the current-measurement
20 supply line 34 and the control line 6. The voltage on the control line 6 is controlled in closed loop manner to achieve the desired current through the display element 2. The control voltage can then be used for subsequent driving of the display element of the pixel during the remainder of the frame period.

25 The feedback system is provided in a column driver of the display device, and Figure 4 shows one example of possible feedback system to be provided in the column driver.

The current-measurement supply line 34 supplies current to the pixel during the pixel programming stage, which is when the feedback system is
30 used. During this stage, the current being drawn is effectively measured by the feedback system. The feedback system is coupled to the column

conductor 6 through a transmission gate 40. With switch 32 and address transistor 16 closed, the closed loop feedback path is formed.

A current-to-voltage converter section 42 provides a voltage at node 43 dependent on the current being provided down the current-measurement supply line 34. The current-to-voltage converter section 42 has a high open loop gain amplifier 44 so that the current-measurement supply line, connected to the virtual earth amplifier input, is held at the voltage V_{SUPPLY} on the other input of the amplifier 44. This is the same supply voltage as for the power supply line 26. The voltage at node 43 differs from this supply voltage by a value $R \times I$, where R is the resistance of the feedback resistor 46 and I is the current flowing. Thus, the output voltage is a function of the current drawn from the current-measurement supply line.

A comparator section 50 compares the voltage at node 43 with an input voltage at input 52 representing the desired current. These sections 42, 50 effectively provide measurement of the current drawn and comparison with the desired current. The amplified output of the comparator section 50 is provided to the column conductor through the gate 40. The comparator section 50 thus also acts as the driver for providing the column conductor voltage.

The comparator section 50 may include an integrating amplifier at its output (not shown in Figure 4). This can further improve the stability of the feedback loop and permit a lower gain to be employed in the amplifier of the comparator, and provide better threshold compensation in practical implementations.

The feedback loop is in equilibrium when the control line voltage on the column conductor 6 provides drive of the drive transistor 22 in the pixel giving rise to the desired current (providing the input voltage at input 52 represents the pixel current in the same way that the voltage at node 43 represents the measured current).

This operation of the feedback system is carried out during a pixel programming mode in which a desired pixel drive current is drawn from the current-measurement supply line 34 and the feedback system generates the corresponding gate voltage for the drive transistor. With reference to Figure 3,

the gate-source voltage for the drive transistor is stored on capacitor 24. This voltage is derived from the voltage provided by the feedback system on the column conductor 6.

After the pixel programming mode, the transmission gate 40 is turned off, and the row conductor 4 is operated to turn off the address transistor 16 and the transistor 32 but to turn on the transistor 30. Transistor 30 remains on during the remainder of the frame period, and until the next time the row is addressed. The source of current for the display element is then reverted to the standard power supply line 26. As well as the gate-source voltage being fixed, the potentials at the gate and source of the drive transistor remain essentially unchanged as there is the same voltage drop across the display element for the given current. Furthermore, the potential on the current-measurement supply line 34 is maintained at the power supply voltage V_{SUPPLY} , which corresponds to the voltage on the power supply line 26 during the pixel drive phase. The electrical environment of the drive transistor 22 is thus unchanged and the exact programmed current is maintained.

The capacitor 24 stores the gate-source voltage even if there are differences in the power supply line voltage, as these are taken up by the source-drain voltage of the transistor 30. The circuit thus compensates for drive transistor mobility variations and threshold voltage variations, and provides some resilience against supply line voltage drops.

The feedback loop is in fact broken by the transmission gate 40 just before the end of the programming phase, and the voltage on the column conductor 6 is maintained by the row parasitic capacitance 60 while the address control signal on the row conductor is changed and the different transistors in the pixel switch on and off.

A feedback circuit of Figure 4 is preferably provided for each column, so that all columns can be addressed simultaneously, in conventional manner, with each row addressed in turn.

The PMOS and NMOS transistors can be of opposite type to those in the example above. Implementations can also be envisaged using the same

type of transistor throughout, although at the expense of additional required control lines to the pixels.

The example described above uses an analogue column driver implementation. However, the pixel circuit of the invention could also be used
5 in conjunction with a digital driver architecture. Thus, the feedback system can be implemented in a variety of ways, not only with the analogue implementation described in detail above.

In the example above, the transistor 30 for switching between the current-measuring feedback operation and the normal pixel drive operation is
10 between the supply line 26 and the anode side of the display element 2. It could alternatively be located on the cathode-side of the display element 2 in the ground return connection.

Various other modifications will be apparent to those skilled in the art

CLAIMS

-
1. An active matrix electroluminescent display device comprising an array of display pixels, each pixel comprising:
- 5 an electroluminescent (EL) display element and a drive transistor for driving a current through the display element;
- a first switch (30) enabling power from a power supply line (26) to be supplied to the display element;
- a second switch for routing current from a current-measurement supply
- 10 line to the display element, the first and second switches being operated in complementary manner; and
- a control line for controlling the gate voltage applied to the drive transistor, wherein a feedback system is provided between the current-measurement supply line and the control line.
- 15
2. A device as claimed in claim 1, wherein the feedback system enables a gate voltage to be determined corresponding to a desired current flow through the drive transistor.
- 20
3. A device as claimed in claim 1 or 2, wherein the feedback system is provided in a column driver of the display device.
4. A device as claimed in any preceding claim, wherein each pixel further comprises a storage capacitor for storing a gate-source voltage of the drive
- 25 transistor.
5. A device as claimed in any preceding claim, wherein each pixel further comprises an address transistor connected between the control line and the gate of the drive transistor.
- 30
6. A device as claimed in claim 5, wherein the address transistor, and the first and second switches are each controlled by a shared control line.
-

7. A device as claimed in claim 6, wherein the address transistor and the second switch are controlled synchronously.
8. A device as claimed in any preceding claim, wherein each switch
5 comprises a transistor.
9. A device as claimed in claim 8, wherein one of the switches is an NMOS TFT and the other is a PMOS TFT.
- 10 10. A device as claimed in any preceding claim, wherein the feedback system comprises:
a current-to-voltage converter section for providing a first voltage corresponding to the current drawn from the current-measurement supply line;
a comparator section for comparing the first voltage with an input
15 voltage representing the desired current; and
a drive section for providing a voltage on the control line, the feedback loop being in equilibrium when the control line voltage provides drive of the drive transistor giving rise to a current corresponding to the input voltage.
- 20 11. A device as claimed in any preceding claim, wherein the device is operable in two modes:
a first mode in which a desired pixel drive current is drawn from the current-measurement supply line and the feedback system generates the corresponding gate voltage for the drive transistor, the corresponding gate-
25 source voltage for the drive transistor being stored; and
a second mode in which a current is driven through the drive transistor and the EL display element using the stored gate-source voltage.
- 30 12. A method of addressing an active matrix electroluminescent display device comprising an array of display pixels, in which each pixel comprises an electroluminescent (EL) display element and a drive transistor for driving a current through the display element, the method comprising, for each pixel:

applying a voltage to the drive transistor to drive a current through the display element, the current being drawn from a current-measurement supply line;

- processing the current using feedback control circuitry outside the array of pixels and having an input representing the desired current;
- generating a control voltage in the feedback control circuitry for the drive transistor using the processed current, thereby implementing a feedback control loop which reaches equilibrium when the current corresponds to the desired current, and supplying the control voltage to the pixel;
- within the pixel, storing a voltage derived from the control voltage; and applying the stored voltage to the gate of the drive transistor and drawing current from a power supply line to illuminate the display element.

13. A method as claimed in claim 12, wherein processing the current comprises converting the current into a voltage, and comparing the voltage with an input voltage representing the desired current to produce an amplified differential output.

14. A method as claimed in claim 13, wherein the control voltage comprises the amplified differential output.


15. A method as claimed in any one of claims 12 to 14, wherein current is drawn from the power supply line through a first switch and current is drawn from the current-measurement supply line through a second switch, the first and second switches being operated in complimentary manner, the first switch being used after an initial pixel programming phase and the second switch being used during the initial pixel programming phase.

ABSTRACT

ELECTROLUMINESCENT DISPLAY DEVICES


5 An active matrix electroluminescent display device comprises an array
of display pixels. In each pixel, a first switch connects power from a power
supply line to the display element and a second switch routes current from a
current-measurement supply line to the display element. The gate voltage
applied to a drive transistor is controlled by a feedback system, such that
10 control voltage is controlled in closed loop manner to achieve the desired
current. The control voltage can then be used for subsequent addressing of
the pixel.

[Fig. 3]

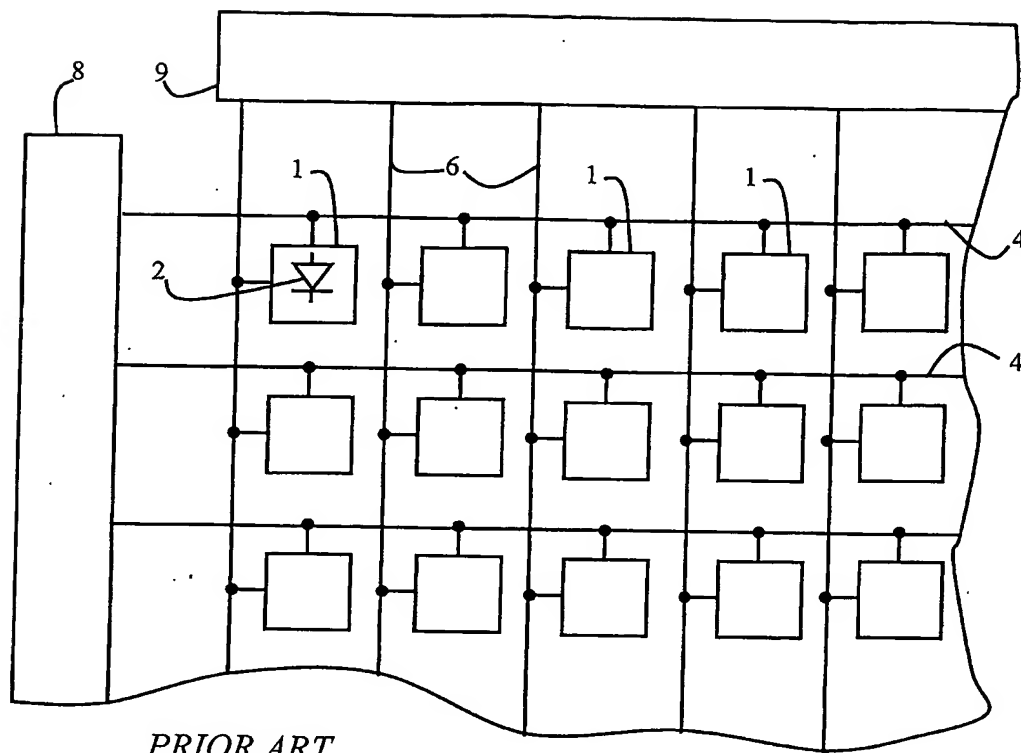

PRIOR ART

FIG. 1

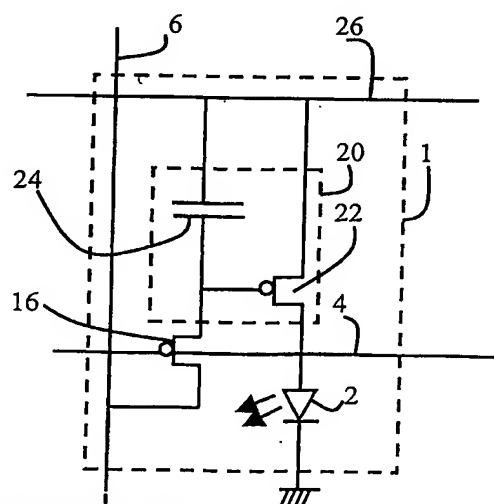

PRIOR ART

FIG. 2

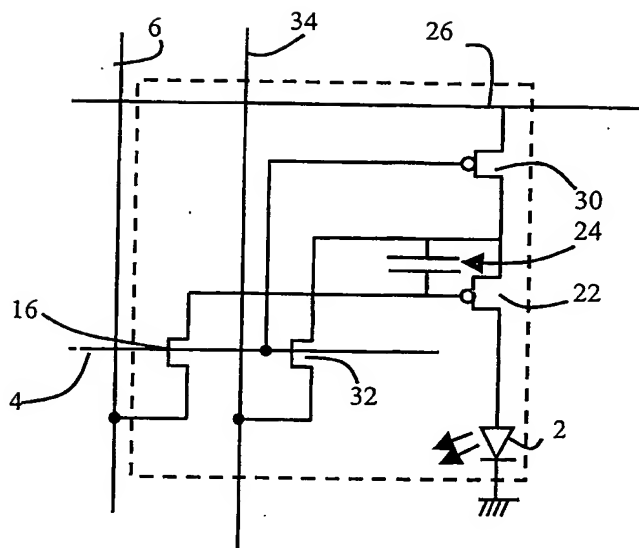


FIG. 3

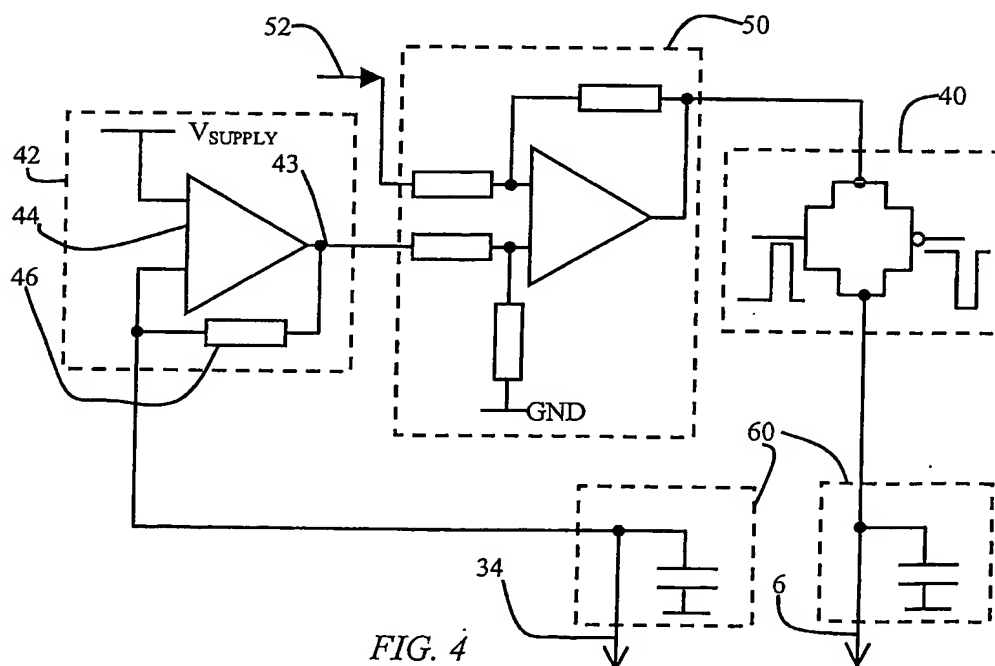


FIG. 4

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☐ **FADED TEXT OR DRAWING**
- ☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☒ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER:** _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.